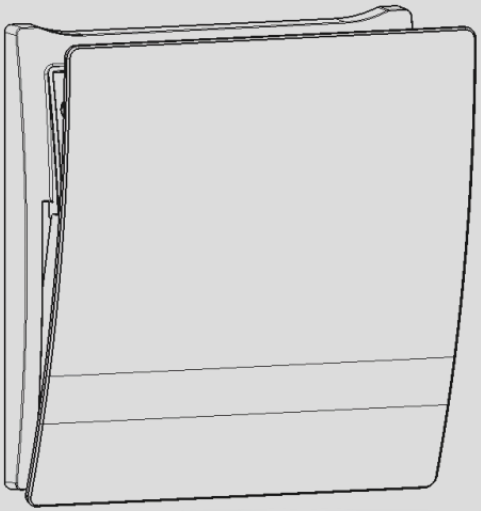
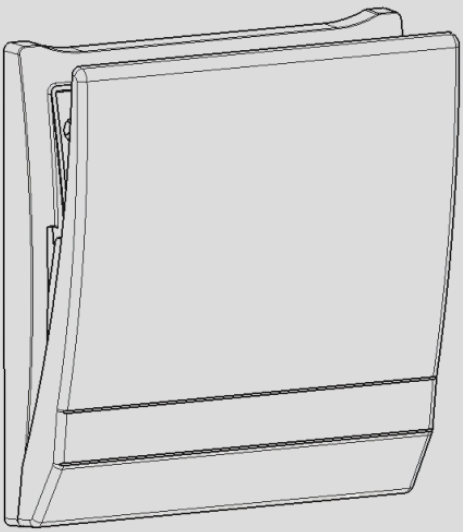


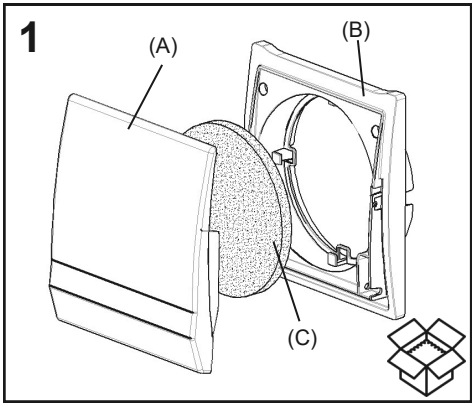


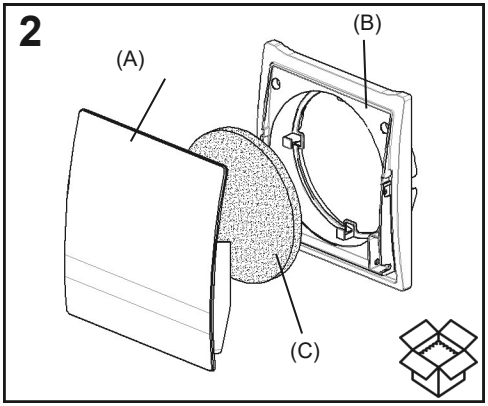
IT **Istruzioni di montaggio**
Pannello interno in plastica
tipo 9/IBK
Cod. art.: 40087
Pannello interno in vetro
tipo 9/IBG
Cod. art.: 40088

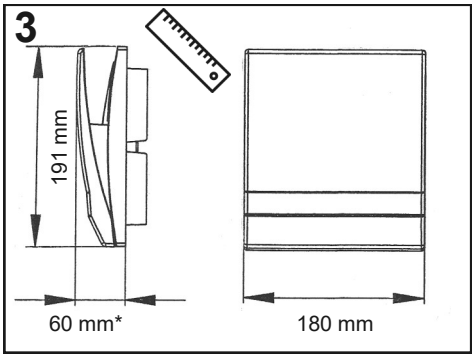
- Da inoltrare all'utilizzatore -

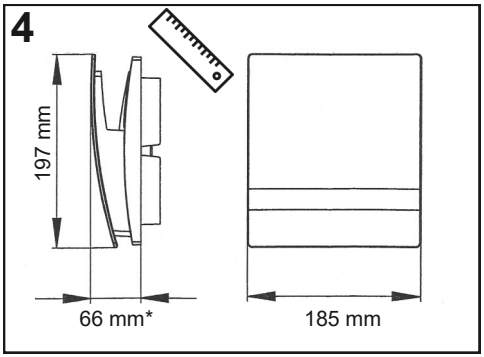
EN **Installation Manual**
Plastic inner screen
Typ 9/IBK
Order No.: 40087
Glass inner screen
Typ 9/IBG
Order No.: 40088

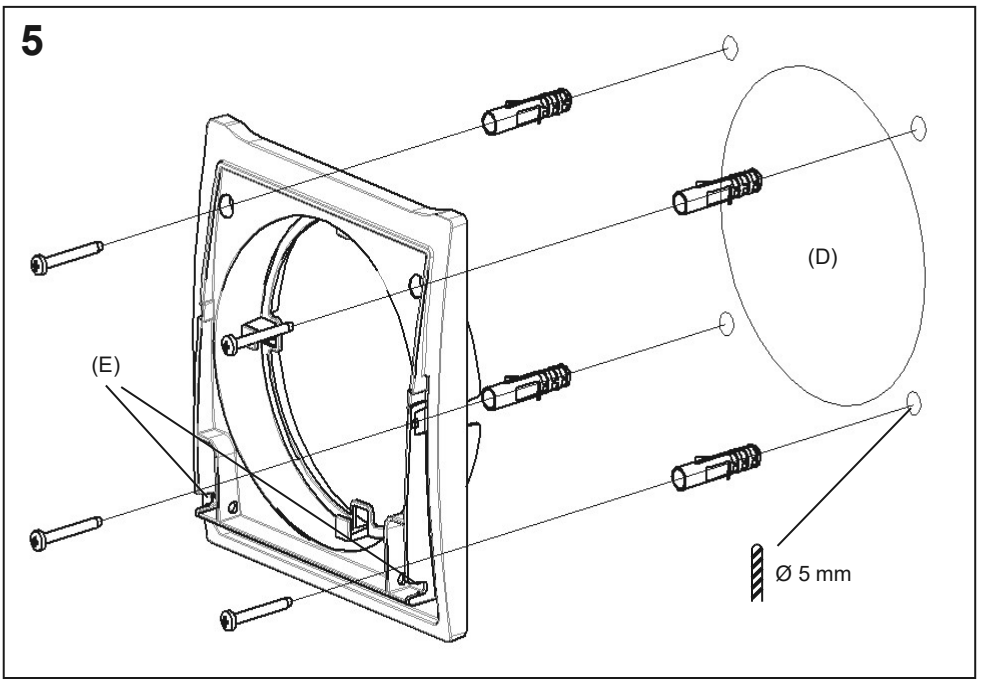
- Please pass on to user -

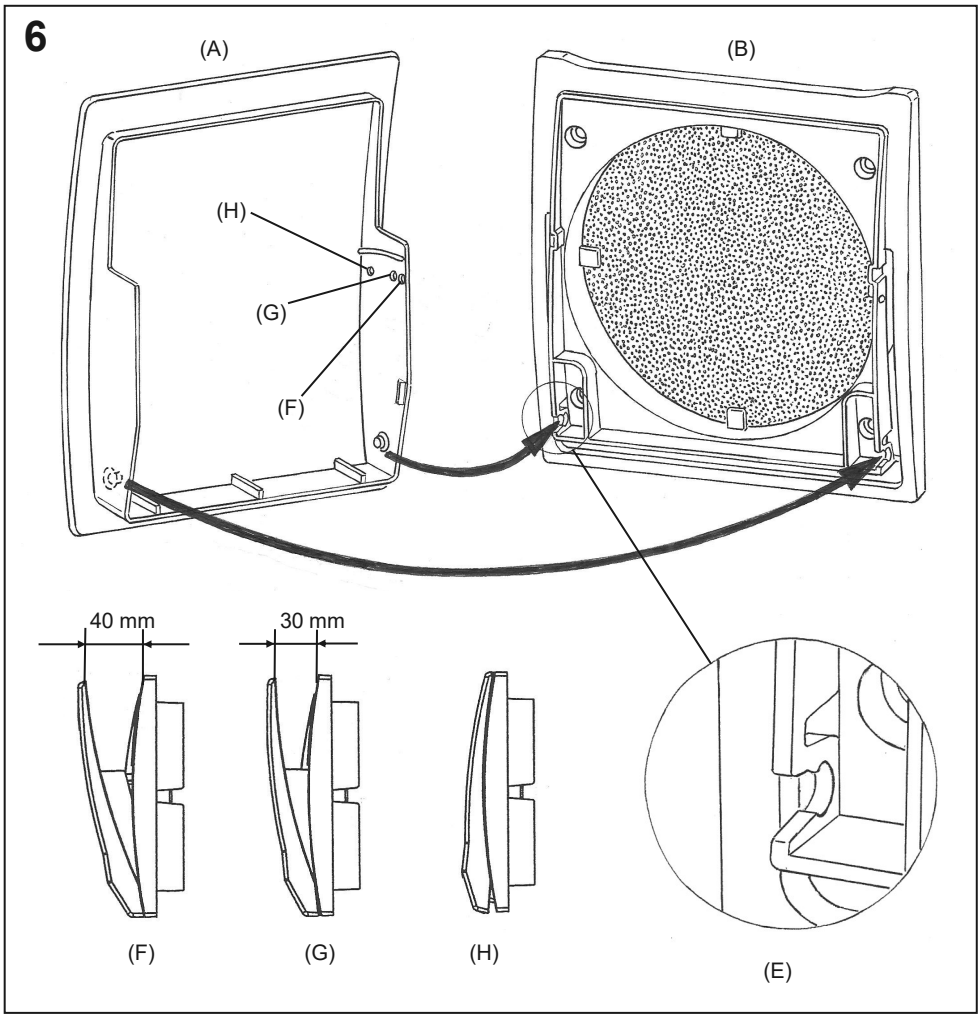

1
(A)
(B)
(C)

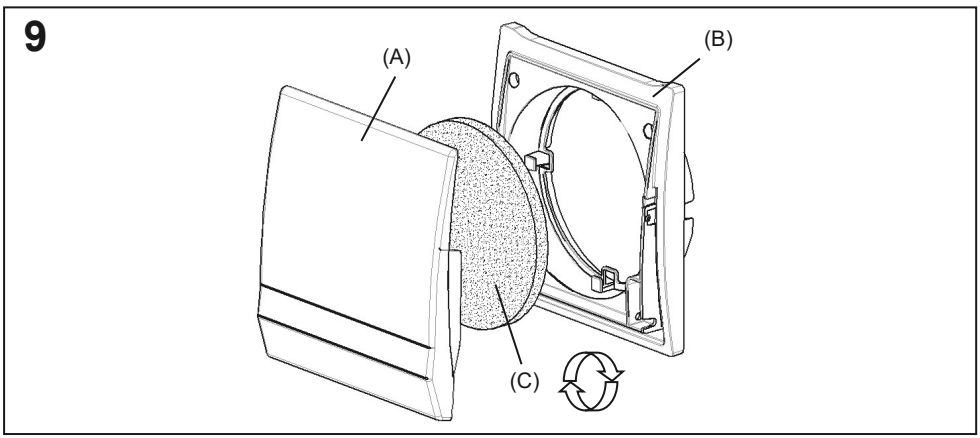

2
(A)
(B)
(C)


3
191 mm
60 mm*
180 mm


4
197 mm
66 mm*
185 mm


5
(D)
(E)
Ø 5 mm


6
(A)
(B)
(H)
(G)
(F)
40 mm
30 mm
(F)
(G)
(H)
(E)


9
(A)
(B)
(C)

Istruzioni di montaggio — IT

Unità di spedizione (figura 1 e 2)

Verificare che la fornitura sia completa e in perfette condizioni.

Figura 1: Pannello interno in plastica tipo 9/IBK Cod. art.: 40087
Figura 2: Pannello interno in vetro tipo 9/IBG Cod. art.: 40088
((A) Pannello interno; (B) telaio del pannello; (C) Filtro)

Disegni quotati (figura 3 e 4)

Figura 3: Pannello interno in plastica tipo 9/IBK Cod. art.: 40087
Figura 4: Pannello interno in vetro tipo 9/IBG Cod. art.: 40088
(* massimo)

Montaggio (figure 5 e 6)

Figura 5: Forare i punti di fissaggio (foro ø 5 mm) per il telaio di copertura, utilizzando il telaio stesso come dima inserendola nel condotto rotondo da 160mm (D) già montato.
Fissare il telaio di copertura davanti all'apertura del condotto con il materiale di fissaggio in dotazione.
Assicurarsi che le aperture per le cerniere (E) nel telaio di copertura siano rivolte verso il basso.
Figura 6: Inserire il filtro e agganciare il pannello interno in posizione aperta a seconda del tipo di apparecchio (ALD oppure e²).
(F) posizione aperta ALD; (G) posizione aperta e²; (H) posizione chiusa.

Sostituzione del filtro (figura 7)

Controllare il filtro ogni 3 mesi per verificarne lo stato di sporco e sostituirlo se necessario. Dopo aver inserito il filtro, agganciare il pannello interno in posizione aperta a seconda del tipo di apparecchio (ALD oppure e²) (vedere Figura 6).
(A) pannello interno; (B) telaio del pannello; (C) filtro
L'apertura dell'aria di mandata non deve essere ostruita nè coperta!

Pulizia

Se necessario, pulire il pannello interno e il telaio di copertura con un panno morbido e asciutto.
La sostituzione del filtro e la pulizia non devono essere effettuate da bambini né da persone che, a causa di capacità fisiche, sensoriali o mentali ridotte, inesperienza o mancanza di conoscenze, non sono in grado di eseguire tali operazioni in sicurezza.

Assembly instructions — EN

Shipping Unit (Figures 1 and 2)

Please check the delivery for completeness and mint condition!

Figure 1: Plastic inner screen type 9/IBK Order No.: 40087
Figure 2: Glass inner screen type 9/IBG Order No.: 40088
((A) inner screen; (B) cover frame; (C) filter)

Dimension drawings (Figures 3 and 4)

Figure 3: Plastic inner screen type 9/IBK Order No.: 40087
Figure 4: Glass inner screen type 9/IBG Order No.: 40088
(* maximum)

Installation (Figures 5 and 6)

Figure 5: Drill the fixing holes (drill - Ø 5mm) for the cover frame, using it as a drilling template by inserting it into the already mounted DA 160 tube (D).
Fasten the cover frame in front of the pipe opening using the supplied screw accessories.
Make sure that the hinge openings (E) in the cover frame are at the bottom!
Figure 6: Insert the filter and snap the inner screen into the open position, depending on the type of unit (ALD or e²)!
((F) open position ALD; (G) open position e²; (H) closed position)

Filter change (Figure 7)

Check the filter every 3 months for contamination and replace it if necessary. After inserting the filter, snap the inner screen into the open position (see figure 6), depending on the type of unit (ALD or e²).
((A) inner screen; (B) cover frame; (C) filter)

Cleaning

When necessary, wipe the front cover and grille frame using a dry soft cloth.
Filter change and cleaning must not be carried out by children or persons who are not able to operate the unit safely on

LUNOS energy-efficient
LUNOS Italia
Recuterm
Via Peter-Mitterhofer 23
39025 Naturno · Italia
Tel. +39 0473 667128
info@lunos.it
www.lunos.it