
Istruzioni di montaggio per le giriglie esterne DA 180
con anello di protezione per facciate
- Da inoltrare all'utilizzatore -

Unità di spedizione

Verificare che la fornitura sia completa e in perfette condizioni.


1/WE 180 (bianco)	Cod.art. 39852
1/AZ 180 (antracite)	Cod.art. 41143
1/BE 180 (sabbiato)	Cod.art. 39917

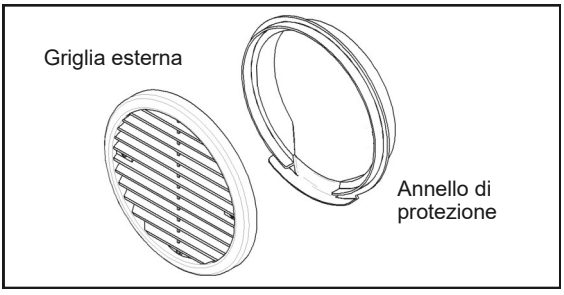

Montaggio

Incollare l'anello di protezione per facciate nel condotto rotondo da 160 installato nella parete, utilizzando il collante da montaggio cod. crt. 38733. Assicurarsi che il gocciolatoio si trovi in basso.

Fissare la griglia esterna inserendo le sue mollette di bloccaggio nel condotto rotondo da 160.

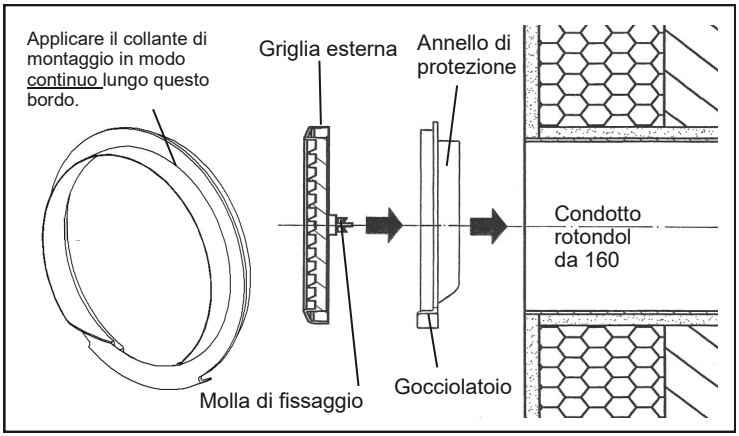

Avvertenza relativa alle coperture esterne LUNOS

- Le coperture esterne LUNOS in plastica piena garantiscono un'elevata resistenza alla pioggia battente e possono essere utilizzate nella classe di sollecitazione III secondo DIN 4108-3 (2014-11). Le griglie esterne metalliche o con rivestimento metallico possono essere utilizzate nella classe di sollecitazione I secondo DIN 4108-3 (2014-11).
- In edifici esposti al vento o in presenza di possibili forti raffiche e pioggia sulle coperture esterne, possono essere necessarie ulteriori misure di protezione dagli agenti atmosferici.
- Durante il periodo di riscaldamento può formarsi condensa sulla copertura esterna, che può defluire verso l'esterno. In inverno verificare che non si crei ghiaccio sul marciapiede o che non si formino stalattiti che possano rappresentare un pericolo per i passanti.

LUNOS Italia
Recuterm
Via Peter-Mitterhofer 23
39025 Naturno · Italia

Tel. +39 0473 667128
info@lunos.it
www.lunos.it


Installation instructions for the outer grating DA 180 with faced protective ring

- Please pass on to user -

Dispatch unit


Check the delivery for completeness and trouble-free status!

1/WE 180 (white)	Order No. 39852
1/AZ 180 (anthracite)	Order No. 41143
1/BE 180 (sanded)	Order No. 39917

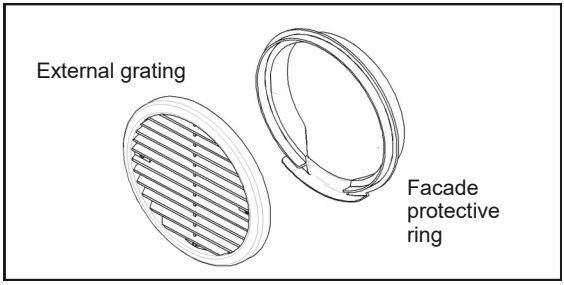

Installation

Bond the facade protective ring with assembly adhesive Order No. 38733 into the DA 160 pipe mounted in the wall.
Ensure the drip edge is below in this case!
Fix the external grating with the claws mounted on it into the DA 160 pipe!

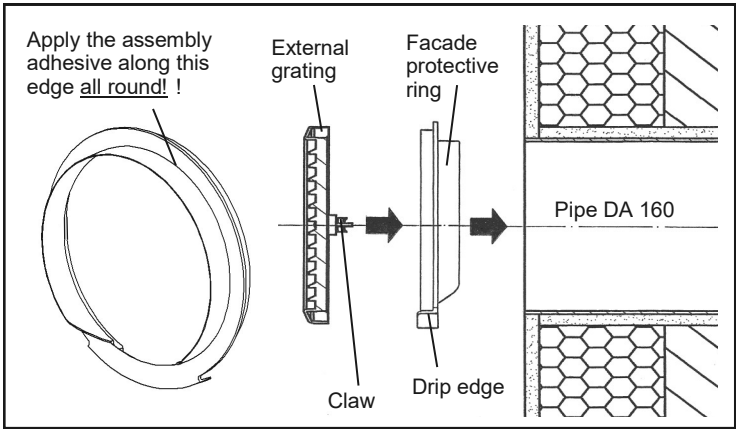

Note on LUNOS external coverings

- The external coverings of fully-synthetic material offered by LUNOS provide for a high resistance to driving rain and can be employed in Stress Group III in accordance with DIN 4108-3 (2014-11). Metallic or metallically-coated external grids in Stress Group I in accordance with DIN 4108-3 (2014-11) can be employed.
- In the case of buildings in locations exposed to wind or the hazard of strong winds and rain on the external coverings, further weather-protection measures are to be taken as appropriate.
- In the external covering, condensate can occur during the heating period and flow out of the opening. In winter, please make sure that there is no ice formation on the sidewalk or that no icicles form which can become a hazard for passers-by!

LUNOS Italia
Recuterm
Via Peter-Mitterhofer 23
39025 Naturno · Italia

Tel. +39 0473 667128
info@lunos.it
www.lunos.it

E205 01.22