Scheda tecnica

Estrattore d'aria AB 30/60

Descrizione

- Ventilatore assiale ad alta efficienza con motore EC per installazione orizzontale nella parete esterna.
- Installazione nel condotto rotondo Ø 160 mm o DN100 (senza inserto fonoassorbente).
- Inclusi isolamento acustico e filtro G2 lavabile.

Nummero d'odine 39 995


Installazione

L'inserto viene montato nel condotto rotondo 9/R 160 con una leggera pendenza verso l'esterno nella parete esterna.
Il collegamento elettrico avviene direttamente tramite un cavo di alimentazione da 230 V (3 x 1,5 mm²). Il ventilatore di estrazione può essere comandato a una o due velocità tramite l'interruttore corrispondente. In alternativa, può essere combinato con il relè di ritardo 5/ZII (in scatola da incasso) o collegato al controllo comfort TAC tramite il modulo aggiuntivo 5/ACM.

Si prega di osservare le istruzioni di montaggio e di far collegare elettricamente il ventilatore da personale qualificato.

Dati tecnici

Portata d'aria	35/70 m³/h
Livello di pressione sonora a 1 m di distanza	28/44 dB(A)
Livello di pressione sonora a 3 m di distanza	19/34 dB(A)
Livello di pressione sonora sulla superficie di misura	25 dB(A)
Livello di potenza sonora L_W	36/52 dB(A)
Assorbimento di potenza	1,5/4,9 W
Tensione di alimentazione	100 - 240 V 50/60 Hz
Foro di carotaggio	162 mm
Lunghezza minima di installazione	170 mm
Dimensioni	Ø 154 x 130
Grado di protezione	IP44

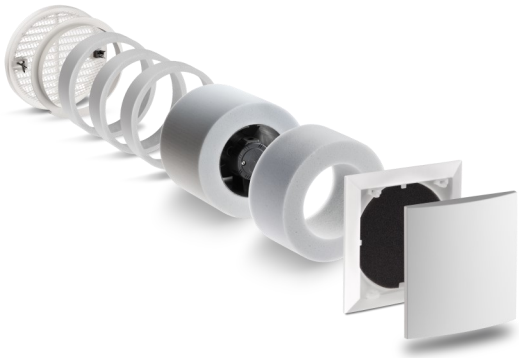



Avviso

I prodotti e le loro immagini possono variare leggermente. A causa di continui sviluppi e/o di diversi fornitori di materiali, ad esempio per le materie prime, i colori possono variare leggermente (non per le parti a vista) o apparire diversamente nei cataloghi.

E258 11.22

Technical Data Sheet

Exhaust air unit AB 30/60

Description

- Highly efficient axial fan with ec-motor for horizontal installation in the outer wall
- Installation in separately available round duct Ø 160 mm or DN100 (without sound insulation insert)
- Including sound insulation and washable G2 filter

Order No. 39 995


Installation

The built-in device is inserted into the wall-tube 9/R 160 and with a slight incline outwards into the outer wall.
The electrical connection is performed directly to a 230 V supply line (3 x 1.5 mm²). The exhaust air fan is operated by means of a one-rocker switch (5/W). Optionally, the fan can be combined with the delay time relay 5/ZII (in a flush -mounted box) or can be connected to the comfort control unit TAC via additional module 5/ACM.

Please observe the installation manual and have the electrical connection of the fan performed by a qualified professional.

Technical data

Volume flow	35/70 m³/h
Sound pressure level at 1 m distance	28/44 dB(A)
Sound pressure level at 3 m distance	19/34 dB(A)
Measuring surface sound pressure level	25 dB(A)
Sound power level L_W	36/52 dB(A)
Power consumption	1,5/4,9 W
Supply voltage	100 - 240 V 50/60 Hz
Core drilling	162 mm
Minimum installation length	170 mm
Dimensions	Ø 154 x 130
Protection class	IP44

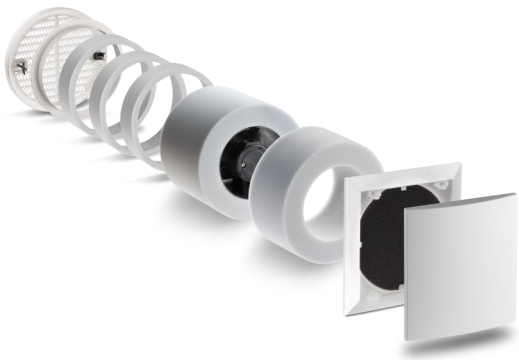



Note

Products and illustrations may vary slightly. Due to continuous product development and/or several suppliers e.g. for raw materials, colours, among other things, may vary slightly (not for visible parts) or be shown differently in brochures.

E258 11.22