Scheda tecnica

Centralina universale 5/UNI-FT

Descrizione

- Unità di controllo per la serie e² e e^{go}, LUNOMAT e per il ventilatore di estrazione RA 15-60 (richiesta la preselezione dell'interruttore di codifica).
- Dotata di sensore di umidità e temperatura.
- Funzioni temporizzate configurabili come funzionamento a intervalli e ritardo allo spegnimento.
- Incluso LED per l'indicazione della sostituzione del filtro e della funzione di ventilazione estiva.
- Per il cambio dei livelli di ventilazione è necessario un interruttore (ad es. 5/W2U).
- Le portate d'aria sono calibrabili.
- Ingresso di controllo 0–10 V per l'integrazione in un sistema di automazione superiore.

Numero d'ordine 40 089


Installazione


L'installazione della 5/UNI-FT avviene in una scatola da incasso profonda (66 mm).
Se per il controllo viene utilizzato un alimentatore da 18 watt, entrambe le componenti possono essere inserite in una scatola da incasso da 95 mm di profondità. In alternativa, è possibile utilizzare un alimentatore da 60 o 100 watt per il montaggio su guida DIN.

Si prega di osservare le istruzioni di montaggio e di far collegare elettricamente i dispositivi da personale qualificato.

Dati tecnici

Tensione di esercizio	12 V DC
Campo di tensione di funzionamento	0 - 10 V
Corrente di commutazione operativa	max. 5 A
Potenza assorbita	max. 60 W
Dimensioni (L x A x P)	25,6 mm x 42 mm x 42 mm
Grado di protezione	IP22
Indicazione per l'alimentatore 5/NT18 5/NT60 5/NT100	 max. 6 e² max. 10 e² max. 20 e² *con almeno. 2 x 5/UNI-FT*



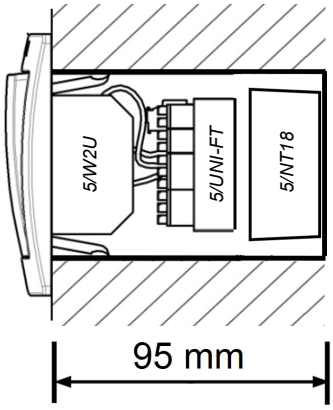

Installazione in scatola da incasso profondita

Avviso

I prodotti e le loro immagini possono variare leggermente. A causa di continui sviluppi e/o di diversi fornitori di materiali, ad esempio per le materie prime, i colori possono variare leggermente (non per le parti a vista) o apparire diversamente nei cataloghi.

E262 11.22

Technical Data Sheet

Universal Control 5/UNI-FT

Description

- Control unit for the series e² and e^{go}, LUNOMAT as well as for the exhaust fan RA 15-60 (presetting of the coding switch necessary)
- Equipped with humidity and temperature sensor
- Timefunctions such as delay function and intervall operation configurable
- Incl. LED for filter change indication and display of summer ventilation function
- A switch (e.g. 5/W2U) is required to change the ventilation stages
- Flow rates configurable
- 0-10V input to connect a higher level automation

Order No. 40 089


Installation


The 5/UNI-FT is installed in a deep flush-mounted box (66 mm deep). If an 18 W power supply unit is used for control, both components can be installed in a 90 mm deep flush-mounted switch box. Alternatively, a power supply unit with 60 W or 100 W can be used for top-hat rail mounting.

Please observe the installation instructions and have the devices connected electrically by a qualified person.

Technical data

Operating voltage	12 V DC
Functional voltage range	0 - 10 V
Operational switching current	max. 5 A
Connected load	max. 60 W
Dimensions (W x H x D)	25,6 mm x 42 mm x 42 mm
Protection type	IP22
Notes on the power supply unit 5/NT18 5/NT60 5/NT100	 max. 6 e² max. 10 e² max. 20 e² *with min. 2 x 5/UNI-FT*



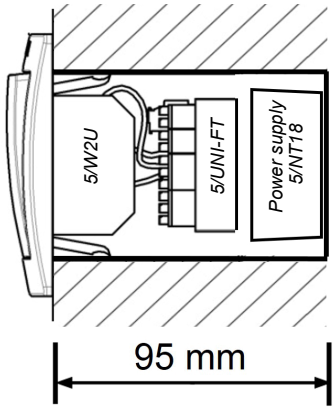

Installation in a deep flush-mounted box

Note

Products and illustrations may vary slightly. Due to continuous product development and/or several suppliers e.g. for raw materials, colours, among other things, may vary slightly (not for visible parts) or be shown differently in brochures.

E262 11.22