Condotto rotondo 9/R 160

Descrizione e funzioni

Il condotto rotondo serve per l'installazione nella parete esterna delle serie e², e^{go}, RA 15-60, AB 30/60, degli elementi di immissione aria tipo ALD e del Nexxt.

La fornitura comprende:
Condotto circolare lungo 500 mm o 700 mm con due coperchi di protezione in polistirene e istruzioni di montaggio

Nummero d'ordine 9/R 160-500 36 765
Nummero d'ordine 9/R 160-700 39 891


Installazione

Per l'installazione del condotto Ø160 mm è necessaria un'apertura a parete con un diametro di carotaggio di 162 mm. La foratura deve essere eseguita con una leggera pendenza di circa 3 mm verso l'esterno (differenza di altezza tra interno ed esterno).
Il condotto rotondo deve essere tagliato a filo con l'intonaco interno ed esterno. In fase di costruzione grezza occorre mantenere una sporgenza su entrambi i lati per compensare lo spessore dell'intonaco.

Per evitare infiltrazioni di acqua capillare e garantire la stabilità, il tubo deve essere sigillato perimetralmente all'interno e all'esterno con un adesivo impermeabilizzante (vedere istruzioni di montaggio).

Dati tecnici

Condotto rotondo dimensioni in mm (Ø x L)	Accorciabile 160 x 500 Accorciabile 160 x 700
Materiale	(PP) Polipropilene
Classe di resistenza al fuoco	B1, difficilmente infiammabile secondo P-BWU03-I-16.5.8

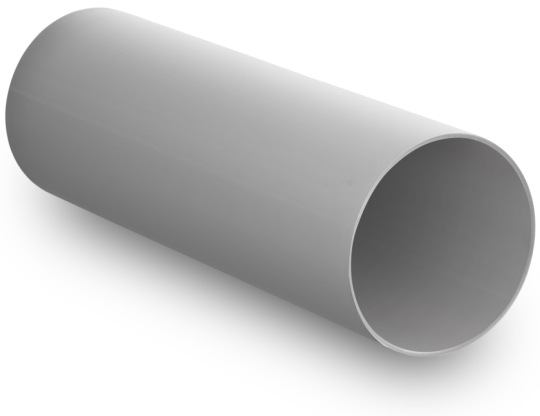

Avviso

I prodotti e le loro immagini possono variare leggermente. A causa di continui sviluppi e/o di diversi fornitori di materiali, ad esempio per le materie prime, i colori possono variare leggermente (non per le parti a vista) o apparire diversamente nei cataloghi.

E259 11.22

Technical Data Sheet

Wall-Tube 9/R 160

Description and functions

The wall-tube is used to install the series e², e^{go}, RA 15-60, AB 30/60, supply elements type ALD and Nexxt into the outer wall.

Included in the scope of delivery:
Wall-tube, 500 mm or 700 mm long, with two Styrofoam plaster protection caps and installation instructions


Order No. 9/R 160-500 36 765
Order No. 9/R 160-700 39 891

Installation

A wall opening with a core bit diameter of 162 mm is required for the installation of the Ø160 mm wall-tube. The drilling has to be carried out with a slight incline of about 3 mm to the outside (height difference inside/outside).
The wall-tube must be shortened flush with the interior and exterior plaster. In the shell construction, care must be taken to ensure the excess length required to bridge the plaster thickness on both sides.
For avoiding pore water and for stabilisation, the pipe must be sealed around the inside and outside with an assembly adhesive (follow installation instructions).

Technical data

Wall-tube dimensions in mm (Ø x L)	160 x 500 (can be shortened) 160 x 700 (can be shortened)
Material	(PP) Polypropylen
Fire protection class	B1, flame retardant according to P-BWU03-I-16.5.8

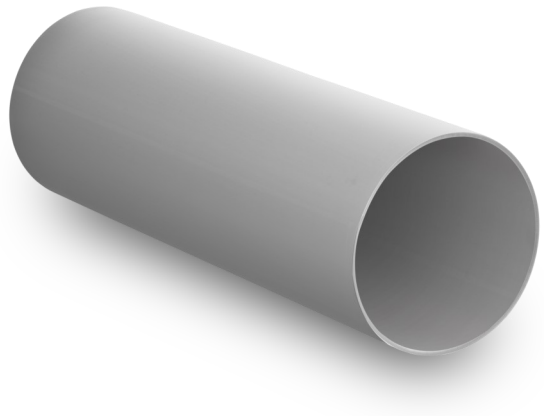

Note

Products and illustrations may vary slightly. Due to continuous product development and/or several suppliers e.g. for raw materials, colours, among other things, may vary slightly (not for visible parts) or be shown differently in brochures.

E259 11.22