LUNOtherm-S / LUNOtherm-S+

Dati tecnici

- Elemento terminale per l'integrazione dell'apertura di ingresso del condotto rotondo nel rispettivo sistema composito di isolamento termico esterno (ETICS) di classe A1 o A2 secondo DIN EN 13501-1 con spessore dell'isolamento di 60 mm. Per altri spessori, il LUNOtherm può essere sovra- o sottoisolato.
- Posizionamento dell'apertura di ingresso nell'imbotte della finestra.
- In combinazione con condotto rotondo 9/R 160, è adatto per tutti gli ALD, la serie e², AB 30/60 o RA 15-60.
- Accorciabile in altezza e larghezza per adattarsi a diverse misure.
- Zanzariera disponibile separatamente in bianco o antracite.
- **LUNOtherm-S+ = LUNOtherm-S con silenziatore 9/SD-LS.**

Approvazione edilizia: Z-56.212-3628

Nummero d'ordine LUNOtherm-S	41 154
Nummero d'ordine 9/SD-LS	41 168

Avviso


Il montaggio del LUNOtherm-S deve essere eseguito accanto alla finestra. La parte superiore può essere ruotata di 180 gradi e inserita sulla parte inferiore, consentendo un'installazione speculare.
Il montaggio con il condotto rotondo posizionato in basso non è consentito, poiché sussiste il rischio di infiltrazione d'acqua piovana. Su richiesta forniamo informazioni su ulteriori posizioni di installazione.


Si prega di osservare le istruzioni di montaggio e di far installare i dispositivi da personale qualificato.


Dati tecnici

Profondità	60 mm
Conduttività termica (λ)	0,03 W/mK

Disegno quotato

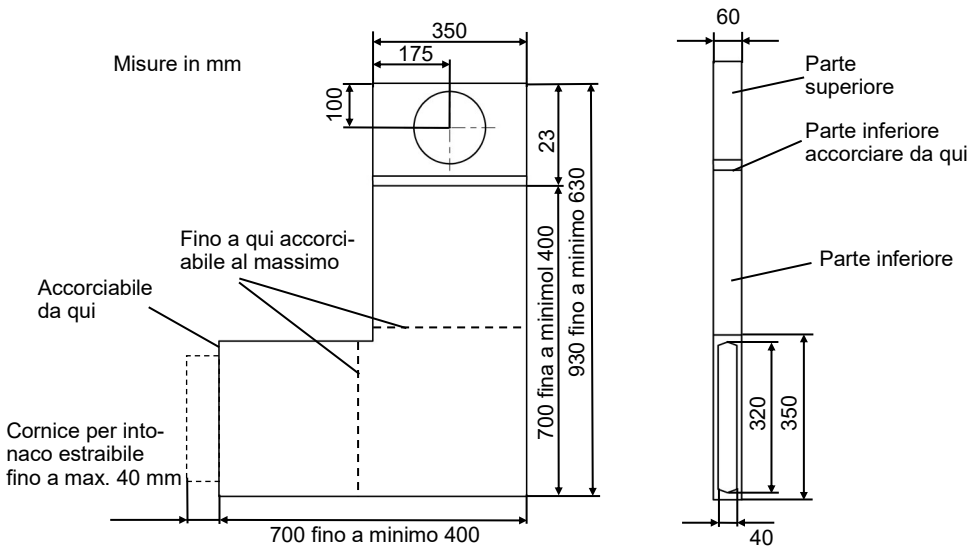

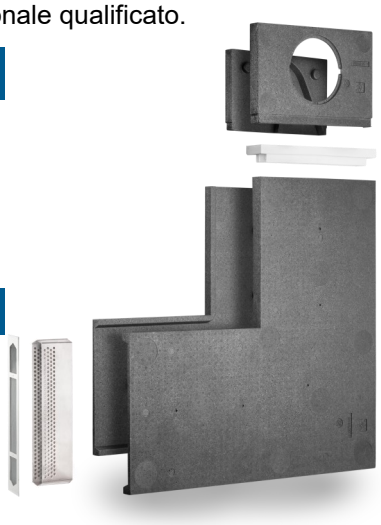

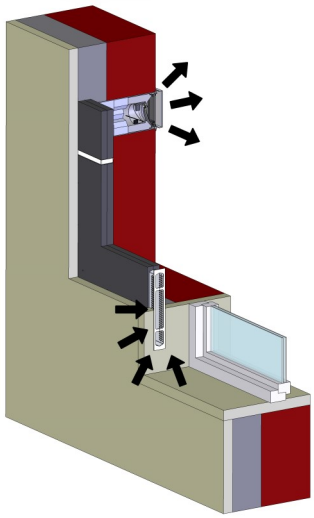

Avviso

I prodotti e le loro immagini possono variare leggermente. A causa di continui sviluppi e/o di diversi fornitori di materiali, ad esempio per le materie prime, i colori possono variare leggermente (non per le parti a vista) o apparire diversamente nei cataloghi.

E342 11.22

Technical Data Sheet

LUNOtherm-S / LUNOtherm-S+

Description


- Finishing element for integration of the flow opening of the round duct into the respective ETICS of class A1 or A2 according to DIN EN 13501-1 of insulation thickness 60 mm. With other insulation thicknesses, LUNOtherm can be over- or under-insulated
- Positioning of the flow opening in the reveal
- Suitable in combination with round duct 9/R 160 for all ALD, series e², AB 30/60 or RA 15-60
- Can be shortened to different dimensions in height and width
- Insect screen in white or anthracite available separately
- **LUNOtherm-S+ = LUNOtherm-S with sound insulation insert 9/ SD-LS**

Order No. LUNOtherm-S	41 154
Order No. 9/SD-LS	41 168

Building inspection approval: Z-56.212-3628

Installation


The LUNOtherm-S should be installed next to the window. The upper part can be turned by 180 degrees and plugged onto the lower part. This allows a mirror-inverted installation. Installation with the wall-tube at the bottom is not permitted as there is a risk of rainwater ingress. We will be pleased to inform you on request about further installation positions .
Please observe the installation instructions and have the units installed professionally.

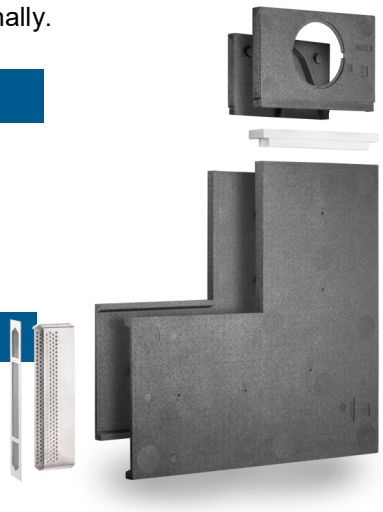


Technical data

Strength	60 mm
Thermal conductivity (λ)	0,03 W/mK

Dimension drawing

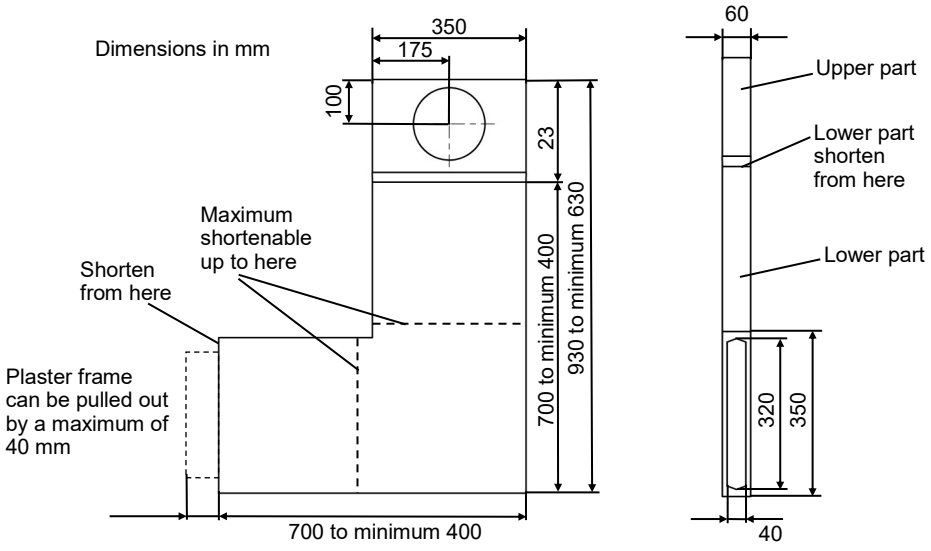

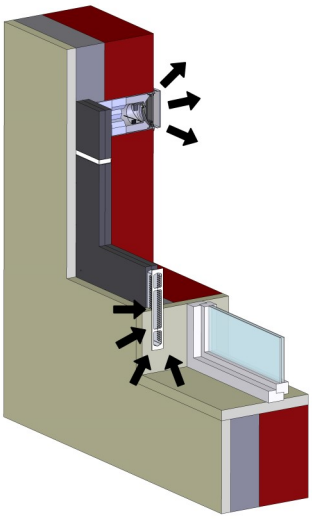

Note

Products and their images may be subject to slight variation. Due to constant further developments and/or several suppliers for e.g. raw materials, colours - among other things - may vary slightly (not for visible parts) or may be shown differently in brochures.

E342 11.22