Scheda tecnica

Estrattore d'aria RA15-60

Descrizione

- Ventilatore radiale ad alta efficienza per installazione orizzontale nella parete esterna.
- Installazione nel condotto rotondo (Ø 160 mm) disponibile separatamente.
- Include motore EC, anelli isolanti, silenziatori a stella e filtro G3 lavabile.
- Comando tramite centralina universale 5/UNI-FT, controllo Smart Comfort 5/SC-FT o TAC.

Nummo d'ordine 39 996


Installazione

L'inserto viene montato nel condotto rotondo 9/R 160, precedentemente installato nella parete esterna con una leggera pendenza verso l'esterno.
Il collegamento e la messa in servizio avvengono tramite uno dei controlli sopra indicati con l'alimentazione elettrica corrispondente.
In alternativa, può essere collegato al controllo comfort TAC. Per ulteriori informazioni, contattare il nostro servizio tecnico clienti.

Si prega di osservare le istruzioni di montaggio e di far collegare elettricamente il ventilatore da personale qualificato

Dati tecnici

Portata d'aria	15 - 60 m³/h
Livello di pressione sonora a 1 m di distanza	16 - 37 dB(A)
Livello di pressione sonora a 3 m di distanza	6 - 27 dB(A)
Livello di pressione sonora sulla superficie di misura	14 dB(A)
Livello di potenza sonora L_W	24 - 45 dB(A)
Assorbimento di potenza	0,6 - 7,2 W
Tensione di alimentazione	12 V DC SELV
Foro di carotaggio	162 mm
Lunghezza minima di installazione	180 mm
Dimensioni	Ø 154 x 147mm
Classe di efficienza energetica	Nessuna
Grado di protezione	IP22

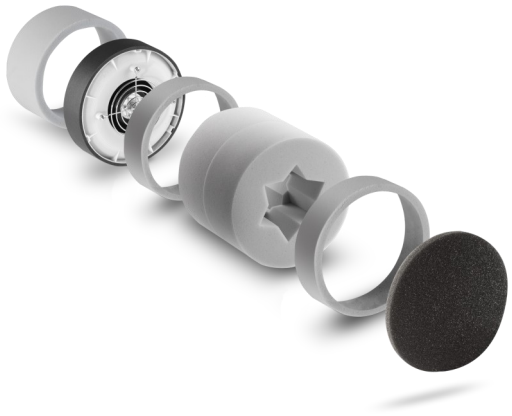

Avviso

I prodotti e le loro immagini possono variare leggermente. A causa di continui sviluppi e/o di diversi fornitori di materiali, ad esempio per le materie prime, i colori possono variare leggermente (non per le parti a vista) o apparire diversamente nei cataloghi.

E249 11.22

Technical Data Sheet

Exhaust air unit RA15-60

Description

- Highly efficient radial fan for horizontal installation in the outer wall
- Installation in separately available round duct (Ø 160 mm)
- Contains an EC motor, damping rings, star-shaped silencers and washable G3 filter
- Control via universal control unit 5/UNI-FT or Smart Comfort Control 5/SC-FT

Order No. 39 996


Installataion

The built-in device is inserted into the wall-tube 9/R 160 (ø 162 mm) and with a slight incline outwards into the outer wall.
Connection and commissioning takes place via one of the above controls with the appropriate power supply.
Optionally, it can be connected via 5/UNI-FT to the comfort control TAC. Please contact our Technical Customer Service for further information.

Please observe the installation manual and have the electrical connection of the fan performed by a qualified professional.

Technical data

Volume flow	15 - 60 m³/h
Sound pressure level at 1 m distance	16 - 37 dB(A)
Sound pressure level at 3 m distance	6 - 27 dB(A)
Measuring surface sound pressure level	14 dB(A)
Sound power level L_W	24 - 45 dB(A)
Power consumption	0,6 - 7,2 W
Supply voltage	12 V DC SELV
Core drilling	162 mm
Minimum installation length	180 mm
Dimensions	Ø 154 x 147mm
Protection class	IP22

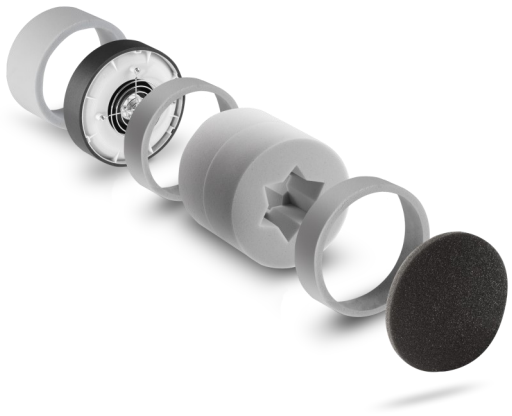

Note

Products and illustrations may vary slightly. Due to continuous product development and/or several suppliers e.g. for raw materials, colours, among other things, may vary slightly (not for visible parts) or be shown differently in brochures.

E249 11.22