Scheda tecnica

Touch Air Comfort

Descrizione

- Unità di controllo per la gestione dei sistemi di ventilazione LUNOS per la ventilazione residenziale.
- Sensore integrato di umidità e temperatura.
- Sensore CO_2 opzionale disponibile tipo “SCO“-TAC (40000).
- Funzioni comfort come riduzione notturna, ventilazione intensiva, modalità party o assenza, gestibili tramite programmazione oraria e settimanale.
- Funzioni temporizzate configurabili come tempo di ritardo allo spegnimento e funzionamento a intervalli.
- Tre uscite indipendenti a bassa tensione 0–10 V.
- Tre ingressi 230 V.
- Inclusa scatola elettronica profonda per installazione orizzontale in pareti cave o massicce.
- Dimensioni della scatola da incasso (L x L x P): 143 × 70 × 75 mm.
- Altezza consigliata: 1,4 – 1,6 m.

Nummero d‘ordine 39 946

Installazione


Per ogni uscita può essere controllato un solo tipo di unità di ventilazione.
L’installazione avviene sotto intonaco nella scatola elettronica/da parete cava fornita in dotazione. L’altezza di montaggio consigliata è di circa 1,50 m dal pavimento finito (OKFF). Per l’alimentazione elettrica da 100–240 V AC è sufficiente un cavo standard NYM 3 x 1,5 mm².
Indicazioni più precise per il montaggio e il collegamento elettrico sono riportate nelle istruzioni di montaggio e messa in servizio.

Il manuale d’uso è disponibile su www.lunos.it e deve essere consegnato all’utente finale (inquilino, proprietario, amministratore, ecc.) al termine dell’installazione.

Dati tecnici

Alimentazione elettrica	100 - 240 V AC 50 Hz
Tensione del dispositivo	12 V DC SELV
Dimensione in mm (L x L x P)	155 x 97 x 20
Dimensioni della scatola in mm (L x L x P)	143 x 70 x 75
Display	Tecnologia E-Ink
Grado di protezione	IP22, CE



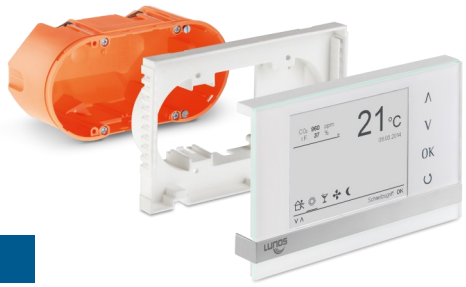

Avviso

I prodotti e le loro immagini possono variare leggermente. A causa di continui sviluppi e/o di diversi fornitori di materiali, ad esempio per le materie prime, i colori possono variare leggermente (non per le parti a vista) o apparire diversamente nei cataloghi.

E247 11.22

Technical Data Sheet

Touch Air Comfort

Description

- Control unit for controlling LUNOS ventilation units for domestic ventilation
- Integrated humidity/temperature sensor
- Optionally available CO2 sensor SCO2-TAC (40000)
- Convenient control of comfort functions such as night setback, intensive ventilation, party mode or absence mode using a time schedule and weekly program
- Time functions such as run-on time and interval operation can be configured
- Three independent 0-10V low voltage outputs
- Three 230V inputs
- Incl. deep electronic box for horizontal installation in cavity wall constructions and solid walls
- Dimensions UP box (L x W x D) 143 x 70 x 75 mm
- Recommended height: 1.4 - 1.6 m

Order No. 39 946

Installation

Only one type of ventilation unit can be controlled via each output.
The installation is carried out under plaster using the supplied electronics / cavity wall box. The recommended installation height is approximately 1.50 m from the finished floor (OKFF = top edge of finished floor). A commercially available NYM cable with 3 x 1.5 mm² is sufficient for the supply voltage of 100-240 V AC.


More detailed information on the installation and electrical connection can be found in the installation and commissioning manual.
The operating manual is available on www.lunos.de and must be passed on to the user (tenant, owner, property manager, etc.) after completion of the installation.

Please observe the installation manual and have the electrical connection of the fan made in a professional manner.



Technical data

Supply voltage	100-240 V AC 50 Hz
Unit voltage	12 V DC SELV
Dimensions in mm (W x H x D)	155 x 97 x 20
Dimensions of box in mm (W x H x D)	143 x 70 x 75
Display	E-Ink technology
Protection type	IP22, CE

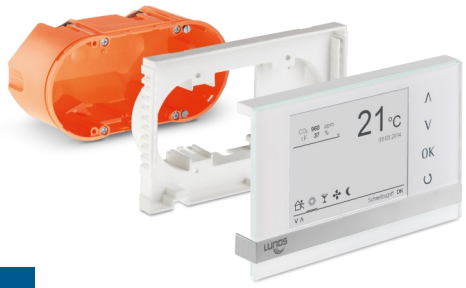

Note

Products and illustrations may vary slightly. Due to continuous product development and/or several suppliers e.g. for raw materials, colours, among other things, may vary slightly (not for visible parts) or be shown differently in brochures.

E247 11.22